



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04B 7/26, 7/216	A1	(11) International Publication Number: WO 00/04652 (43) International Publication Date: 27 January 2000 (27.01.00)
<p>(21) International Application Number: PCT/US99/16183</p> <p>(22) International Filing Date: 15 July 1999 (15.07.99)</p> <p>(30) Priority Data: 09/116,910 17 July 1998 (17.07.98) US</p> <p>(71) Applicant (for all designated States except US): MOTOROLA, INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): PETERS, Robert, Anthony [US/US]; 1010 Cannon Road, Silver Spring, MD 20904 (US). HOGBERG, Shawn, Wesley [US/US]; 5830 W. Orchid Lane, Chandler, AZ 85226 (US). EMMONS, Thomas, Peter, Jr. [US/US]; 2639 South El Marino, Mesa, AZ 85202 (US). STARTUP, James, William [US/US]; 42 East Maria Lane, Tempe, AZ 85284 (US).</p> <p>(74) Agents: INGRASSIA, Vincent, B. et al.; Motorola, Inc., Intellectual Property Dept., P.O. Box 10219, Scottsdale, AZ 85271-0219 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p>
<p>(54) Title: METHOD FOR SYNCHRONOUS CODE DIVISION MULTIPLEXED COMMUNICATIONS</p> <div data-bbox="454 1155 1169 1638"> <pre> graph TD 300[GPS SATELLITE BROADCAST GPS SIGNALS TO COMMUNICATIONS NODE 300] --> 310[ACQUIRE GPS TIMING DATA 310] 310 --> 320[SYNCHRONIZE INTERNAL CODE GENERATOR WITH GPS TIME 320] 320 --> 330[COMMUNICATE TIME INFORMATION TO SUBSCRIBER UNIT 330] 330 --> 340[RECEIVE TIME INFORMATION 340] 340 --> 350[ADJUST INTERNAL CODE GENERATOR BASED ON DELAY OF RECEIVED TIMING INFORMATION 350] 350 --> 360[COMMUNICATE WITH COMMUNICATIONS NODE USING ADJUSTED CODE GENERATOR 360] 360 --> 370[COMMUNICATE WITH SUBSCRIBER UNIT 370] 370 --> 380[TRANSMIT MESSAGE WHICH INDICATES DESIRED FURTHER ADJUSTMENT OF SUBSCRIBER UNIT CODE GENERATOR 380] 380 --> 390[RECEIVE MESSAGE INDICATING DESIRED FURTHER ADJUSTMENT OF CODE GENERATOR 390] 390 --> 400[FURTHER ADJUST INTERNAL CODE GENERATOR 400] </pre> </div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD FOR SYNCHRONOUS CODE DIVISION MULTIPLEXED COMMUNICATIONS

5 Field of the Invention

The invention relates generally to wireless communication systems and, more particularly, to code division multiplexed communication systems.

10 Background of the Invention

In a code division multiplexed communication system, an information signal, typically in digital form, is multiplied by a unique pseudonoise code, upconverted to a carrier frequency, and transmitted from a subscriber unit to
15 a receiving station. Generally, the bandwidth of the pseudonoise code is much greater than the bandwidth of the information signal. Thus, the effect of the multiplication of the information signal by the pseudonoise code is to greatly increase the bandwidth occupied by the product signal. Each subscriber unit using the code division multiplexed communication system is
20 assigned a different unique pseudonoise code with all subscriber units sharing the same product signal bandwidth.

At a receiving end of the communication system, the signal is first received through an appropriate antenna and downconverted. The downconverted signal is correlated with the pseudonoise code assigned to
25 the particular transmitting subscriber unit. During the correlation process, a product signal of the particular transmitting subscriber unit is separated from the signals of other transmitting subscriber units. The correlated output represents the signal from the particular transmitting subscriber unit. The cross-correlated outputs (e.g. signals from other transmitting subscriber
30 units) are desirably minimized. By maximizing correlated outputs and minimizing cross-correlated outputs, the number of subscriber units which make use of the communication system is increased.

Therefore, what is needed are a method and system for minimizing the cross-correlated outputs of the correlator of a code division multiplexed
35 communication system. What is also needed are a method and system for maximizing the correlated outputs of the correlator of a synchronizing the code division multiplexed communication system. What is also needed is a code division multiplexed communications system which has a greater capacity than conventional code division multiplexed systems.

Brief Description of the Drawings

The invention is pointed out with particularity in the appended claims. However, a more complete understanding of the present invention may be derived by referring to the detailed description and claims when considered in connection with the figures, wherein like reference numbers refer to similar items throughout the figures, and:

FIG. 1 illustrates a satellite communications node in accordance with a preferred embodiment of the invention;

FIG. 2 illustrates a satellite communications node in low earth orbit in accordance with a preferred embodiment of the invention;

FIG. 3 illustrates an unsynchronization in timing of the downconverted signal received from a transmitting subscriber unit and the pseudonoise code generator of the receiving communications node;

FIG. 4 illustrates a correlator output when pseudonoise code generators of a transmitting and a receiving node are unsynchronized;

FIG. 5 illustrates a correlator output when pseudonoise code generators of transmitting and receiving nodes are synchronized in accordance a preferred embodiment of the invention;

FIG. 6 illustrates a subscriber unit transceiver which performs synchronous code division multiplexed communications with a communications node in accordance with a preferred embodiment of the invention; and

FIG. 7 illustrates a simplified flowchart of a method for providing synchronous code division multiplexed communications in accordance with a preferred embodiment of the invention.

Description of the Preferred Embodiments

In a code division multiplexed communication system, correlated outputs can be maximized and cross-correlated outputs minimized by synchronizing the code generators of the transmitting and receiving subscriber units. (This is herein referred to as a synchronous code division multiplexed communication system.) In general, greater synchronization reduces cross-correlation products which, in turn, increases the capacity (e.g. the number of subscriber units) of the communication system. Additionally,

in a code division multiplexed communication system where earth-based subscriber units communicate with a satellite in a low earth orbit, establishing synchronization between the satellite and a subscriber unit can be difficult due to the time required for a signal to propagate from a transmitting node to a receiving node. In typical terrestrial code division multiplexed systems, where the time required for a transmitted signal to travel from a subscriber to a base station can be significant when compared to the rate at which the code generators operate. Additionally, for the case of a low earth orbit satellite which moves relative to an earth-based subscriber unit, maintaining synchronization between the subscriber unit and the satellite communications node can be problematic as well.

The present invention provides, among other things, a method and system for synchronous code division multiplexed communications in a satellite communications system. A significant increase in the number of subscriber units which communicate with a communications node is achieved. The timing of pseudonoise code generators are preferably controlled in both the receiving and transmitting subscriber units. Through this control, the cross-correlated outputs at the correlator of the receiving communications node are reduced which enables communications nodes to be constructed which service a greater number of subscriber units than previously possible. A more cost-effective delivery of communication services to subscribers with only a minimal increase in complexity is provided.

FIG. 1 illustrates a satellite communications node in accordance with a preferred embodiment of the invention. Communications node 200 provides synchronous code division multiplexed communications with subscriber units. In FIG. 1, communications node 200 comprises global positioning system receiver 205 coupled to antenna 206 which receive timing signals from a component satellite of a global positioning system. In a preferred embodiment, received timing signals from global positioning system receiver 205 are input to processor 275. Processor 275, among other things, maintains an accurate timing reference which enables pseudonoise code generator 220 to maintain a stable time base. Processor 275 also conveys timing signals to earth-based subscriber units through transmitter 285 and antenna 288. The subscriber units possess pseudonoise code generators which perform a substantially identical functions as pseudonoise code

generator 220.

Communications node 200 also comprises intersatellite transceiver 210 coupled to antenna 207 which provide a substantially high bandwidth data link to other similar communications nodes which comprise the code division
5 multiplexed communications system. Communications node 200 also includes pseudonoise code generator 220 as well as receiver/downconverter 240. Outputs of pseudonoise code generator 220 and receiver/downconverter 240 are input to correlator 230. Correlator 230 of communications node 200 provides an output for each earth-based
10 subscriber unit. In a preferred embodiment, communications node 200 also provides a link to ground base stations through ground link transceiver 280.

FIG. 2 illustrates a satellite communications node in low earth orbit in accordance with a preferred embodiment of the invention. FIG. 2 illustrates communications node 200 in communication with global positioning satellite
15 215, and similar communications node 200 through antennas 206 and 207, respectively. Communications node 200 of FIG. 2 also provides communication with subscriber units 250 and 260 through antenna 288. Communications between communications node 200 and ground base station 270 occurs by way of antenna 282.

FIG. 3 illustrates an unsynchronization in timing of the downconverted signal received from a transmitting subscriber unit and the pseudonoise code generator of the receiving communications node. As shown in FIG. 3, the downconverted signal is clocked on the falling edge of the signal with time T2
20 being one clock cycle later than time T1. Note that the downconverted signal of FIG. 3 is unsynchronized with the clock of the pseudonoise code generator of the receiving communications node.

FIG. 4 illustrates a correlator output when pseudonoise code generators of a transmitting and a receiving node are unsynchronized. As shown in FIG. 4, (using the elements of FIG. 1 as an example) the unsynchronization in
30 time between the downconverted signal (representing an output from receiver/downconverter 240) and the pseudonoise code (representing an output of pseudonoise code generator 220) creates correlated output 261 and cross-correlated output 251. In this example, as the unsynchronization increases, correlator output 261 (representing an information signal from subscriber unit 260) decreases, while cross-correlated output 251
35 (representing an information signal from subscriber unit 250 of FIG. 2)

increases. Therefore, when subscriber unit 250 begins transmitting a signal, the cross-correlated output from subscriber unit 260 (of FIG. 2) interferes with the correlated output for subscriber unit 250.

Thus, when an unsynchronization in timing occurs, the resulting
5 condition causes correlator 230 to generate interference in the form of cross-correlated outputs which interfere with correlated outputs from other subscriber units. Generally, as signals from more transmitting subscriber units are received by communications node 200, the greater the amount of cross-correlated interference signals which are present at the output of
10 correlator 230.

FIG. 5 illustrates a correlator output when pseudonoise code generators of transmitting and receiving nodes are synchronized in accordance a preferred embodiment of the invention. As shown in FIG. 5, (using the elements of FIG. 1 as an example) under synchronized receive conditions the
15 cross-correlated output becomes vanishingly small while the correlated output is maximized. As previously mentioned herein, these small cross-correlation products, such as that shown in FIG. 5, represent a desirable condition which allows an increase in the number of users which can communicate with communications node 200.

20 Communications node 200 preferably determines the offset error in timing from the correlator 230 for each of the signals from subscriber units 250 and 260. This offset error is the timing error in the pseudonoise code necessary to synchronize the codes. This offset error is used to transmit timing error information to the subscriber units, 250 and 260.

25 FIG. 6 illustrates a subscriber unit transceiver which performs synchronous code division multiplexed communications with a communications node in accordance with a preferred embodiment of the invention. In FIG. 6, antenna 10 facilitates the transmission and reception of signals to and from subscriber unit 260. Receiver/downconverter 20 is
30 coupled to antenna 10 and to correlator 30. Receiver/downconverter 20 and correlator 30, perform substantially identical functions as receiver/downconverter 240 and correlator 230 of communications node 200. Similarly, pseudonoise code generator 70 performs a substantially identical function as that performed by pseudonoise code generator 220 in
35 communications node 200.

In a preferred embodiment, subscriber unit 260 also includes data

source 110 which provides a data signal comprising digitized voice (when used in conjunction with a vocoder), facsimile data, or other digital information to code division multiplexer 100. The output of pseudonoise code generator 70 is also incident on code division multiplexer 100. Code division multiplexer 100 multiplies the data from data source 110 according to the unique code generated by pseudonoise code generator 70. The code division modulated output of code division multiplexer 100 is then up-converted and transmitted through up-converter/transmitter 80 and conveyed to antenna 10. The radiated signal can then be received by an antenna, such as antenna 288, of communications node 200.

Subscriber unit 260 additionally comprises global positioning system receiver 60. Global positioning system receiver 60 can receive signals from global positioning system satellites through antenna 10, or may make use of a separate antenna (not shown). Global positioning system receiver 60 is functionally coupled to processor/memory unit 40 and provides the time base for other functions of subscriber unit 260 such as current time and date. Global positioning system receiver 60 (as well as global positioning system receiver 205 of FIG. 1) preferably receives signals from a component of the global positioning system currently operated by the United States Department of Defense. In accordance with an alternative embodiment, communications node 200 receives signals from a component of an equivalent system such as the GLONASS System currently operated by the Russian Federation.

Subscriber unit 260 further comprises a timing offset element 50 which provides a timing offset to pseudonoise code generator 70. Through the use of timing offset element 50, the pseudonoise code output of pseudonoise code generator 70 is desirably synchronized with pseudonoise code generator 220 of communications node 200 (FIG. 1). Subscriber unit 260 also includes other elements for communicating within a code division multiplexed system.

As the basic hardware elements of communications node 200 and subscriber units 250 and 260 have now been described, the methods which utilize these elements to provide synchronous code division multiplexed communications are described below.

FIG. 7 illustrates a simplified flowchart of a method for providing synchronous code division multiplexed communications in accordance with a preferred embodiment of the invention. Communications node 200 of FIG. 1

-7-

operating in conjunction with subscriber unit 260 are suitable for performing the method. In step 310, the communications node acquires global positioning system timing and position information from a global positioning system satellite. The communications node updates its own position and
5 may use past position updates to generate its velocity vector. For satellite systems, this information comprises the satellite's ephemeris. Other techniques well known in the field may be used to generate the communication node ephemeris. In step 320, timing data from the global positioning system receiver is used by the communications node to
10 synchronize an internal code generator with the global positioning system time. In step 330, the time information is communicated from the communications node to a subscriber unit. In a preferred embodiment, the information in step 330 may be a code division multiplexed pilot channel synchronized to global positioning system time. In an alternative
15 embodiment, the information of step 330 includes actual timing signals. In another alternative embodiment, the information of step 330 includes transmitting ephemeris data, such as a position and velocity of the communications node, to a subscriber unit.

In step 340, a subscriber unit receives time information from a
20 communications node through a suitable antenna. Step 340 also includes down converting and conveying the timing data to a processor/memory unit. In step 350, the subscriber unit advances an internal code generator based on the time delay of the received timing information. This may be performed by comparing the received timing information with a current time received
25 through a global positioning system receiver included within the subscriber unit. The timing advance is equal and opposite to the value for the timing delay. Step 350 may also include using satellite ephemeris data to estimate a time delay based on the ephemeris of the communications node transmitted in step 330. Through the use of the ephemeris of the
30 communications node and position data from the subscriber unit global positioning system receiver, the subscriber unit can perform a position calculation in order to estimate the distance between itself and the communications node. This estimate can then be used to determine a time delay. Additionally, by utilizing the velocity vector portion of the
35 communications node ephemeris, the subscriber unit can predict the distance to the communications node at a future time and therefore calculate the

-8-

corresponding time delay. These calculations can be performed through the use of a suitable processor/memory unit known to those skilled in the art.

In step 360, the timing delay is conveyed from subscriber unit processor/memory unit to a pseudonoise code generator by way of a timing offset element. In response to the timing delay, the pseudonoise code generator can advance the pseudonoise code to compensate for the timing delay. This allows the subscriber unit to communicate with a communications node using an a pseudonoise code which will be time-synchronized with the pseudonoise code generator of the communications node when received at the node. The path delay between the subscriber unit and the communications node is equal to the timing advance calculated in step 350.

In step 370, the subscriber unit communicates synchronous code division multiplexed communication signal with the communications node. In step 370, the communications node desirably employs "multi-user detection" to subtract out small cross-correlation products received from subscribers. Multi-user detection, allows some relaxation in the synchronization of the pseudonoise code generators in a subscriber unit and a communications node. In multi-user detection, the cross-correlated outputs of the correlator of a code division multiplexed communication system are subtracted from the correlated output. This allows the code division multiplexed communication system to function synchronously even with some unsynchronization in timing between the code generators.

In step 380, the communications node measures the timing offset of the received signal and transmits a message which indicates the desired direction of a further adjustment to the code generator of the subscriber unit. In a preferred embodiment, the transmitted message of step 380 is comprised of a single binary digit transmitted on a non-traffic communications channel. In this embodiment, a binary one indicates that timing should be advanced by a specific predetermined amount while a binary zero indicates that timing should be delayed by a specific predetermined amount. Step 380 allows the pseudonoise code generator of the subscriber unit to maintain synchronization with the pseudonoise code generator of the communications node through a periodic update from the communications node.

In step 390, the subscriber unit receives a message which indicates the desired correction of the internal clock. In step 400, the adjustment is made

to the subscriber unit pseudonoise code generator offset calculation. The subscriber unit then returns to step 360 where communications is conducted with the communications node.

5 In an alternative embodiment, the transmitted messages of step 380 are comprised of a binary word which conveys a magnitude as well as a timing advance or delay indicator. This allows the pseudonoise code generator of the subscriber unit to more easily maintain synchronization with the pseudonoise code generator of the communications node. Additionally, when a succession of the transmitted messages of step 380 are comprised of
10 messages which indicate a trend of timing advances or delays, the subscriber unit can perform a prediction as to the timing advance or delay needed at a time in the future. This enables the subscriber unit to maintain synchronization between updates in timing advance or delay indicators from communications node 200. This technique is employed without the utilization
15 of GPS receivers, or, for example, when the reception of GPS signals is not possible.

A method and system for synchronous code division multiplexed communications in a satellite communications system of the present invention provides a means for increasing the number of users which can
20 communicate with a node of the system. This results in more cost-efficient system operation as well as lowering subscriber costs. Additionally, through the use of multi-user detection, the synchronization accuracy is reduced while still achieving the benefits of synchronous code division multiplexed communications.

25 The foregoing description of the specific embodiments will so fully reveal the general nature of the invention that others can, by applying current knowledge, readily modify and/or adapt for various applications such specific embodiment without departing from the generic concept, and therefore such adaptations and modifications should and are intended to be comprehended
30 within the meaning and range of equivalents of the disclosed embodiments. It is to be understood that the phraseology or terminology employed herein is for the purpose of description and not limitation. Accordingly, the invention is intended to embrace all such alternatives, modifications, equivalents and variations as fall within the true spirit and broad scope of the appended
35 claims.

-10-

CLAIMS

What is claimed is:

5

1. A method of communicating code division multiplexed signals, comprising the steps of:

advancing an internal code generator of a receiver in a time domain to compensate for a time delay of received timing signals; and

10

communicating a code division multiplexed signal with a communications node using said internal code generator, said code division multiplexed signal being received synchronously by said communications node.

15

2. The method of claim 1, wherein said received timing signals are provided by a low earth orbit satellite.

20

3. (Subscriber receiving signals from a GPS) The method of claim 1, wherein said the received timing signals are provided by synchronizing step comprises receiving timing signals from a global positioning system satellite.

25

3. The method of claim 2, wherein the advancing step additionally comprises the step of combining said received timing signals with ephemeris data for said low earth orbit satellite in order to predict a time delay of future received timing signals.

30

4. The method of claim 2, wherein the advancing step additionally comprises the step of using a plurality of previously received timing signals to predict a time delay of a future received timing signal.

5. The method of claim 1, wherein the communicating step additionally comprises the step of receiving a message which commands said internal code generator to incrementally advance based on a change in a time delay in a transmission to said communications node.

6. The method of claim 1, wherein the communicating step additionally comprises the step of receiving a message which commands said internal code generator to incrementally delay based on a change in a time delay for a transmission from to said communications node.

5

7. A method for communicating code division multiplexed signals with a subscriber unit, comprising the steps of:

synchronizing a communications node internal code generator based on a signal from said subscriber unit;

10 developing timing information based on said signal;

conveying said timing information to said subscriber unit; and

communicating with said subscriber unit using code division multiplexed signals, wherein said subscriber unit adjusts an internal code generator based on a time delay associated with the receipt of said timing information in

15 which signals are received synchronously at said communications node.

8. The method of claim 7, wherein the communicating step additionally comprises the step of conveying an indicator to incrementally advance timing of said internal code generator based on a change in said time delay in a
20 transmission from said subscriber unit to said communications node.

9. A subscriber unit, comprising:

a receiver which receives a timing signal from a communications node;

25 a timing offset element coupled to the receiver which adjusts timing of
an internal code generator in response to said timing signal; and30 a modulator coupled to a data source and said internal code generator
which produces a code division multiplexed signal for transmission to said
communications node, said code division multiplexed signal being offset so
that a transmission from said subscriber unit is received synchronously at
said communications node.

-12-

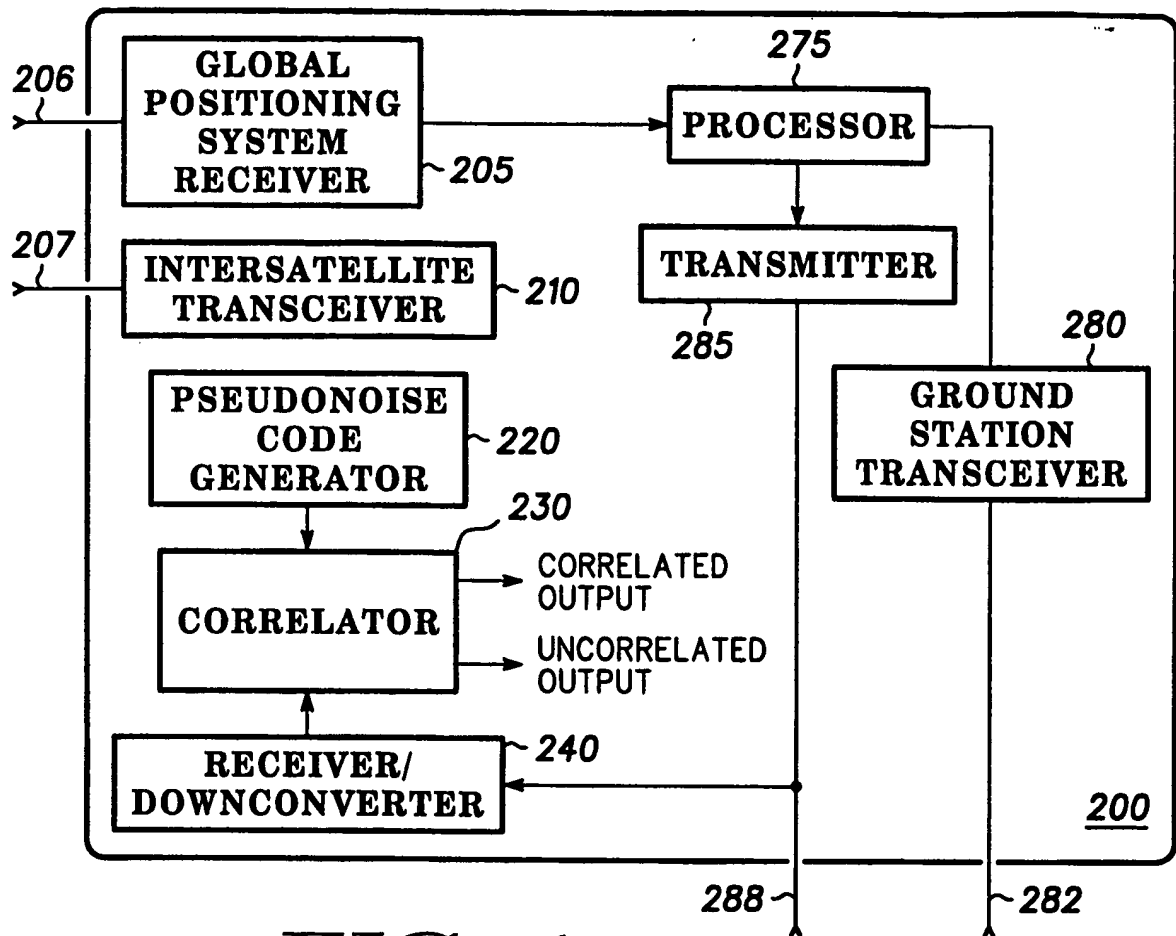
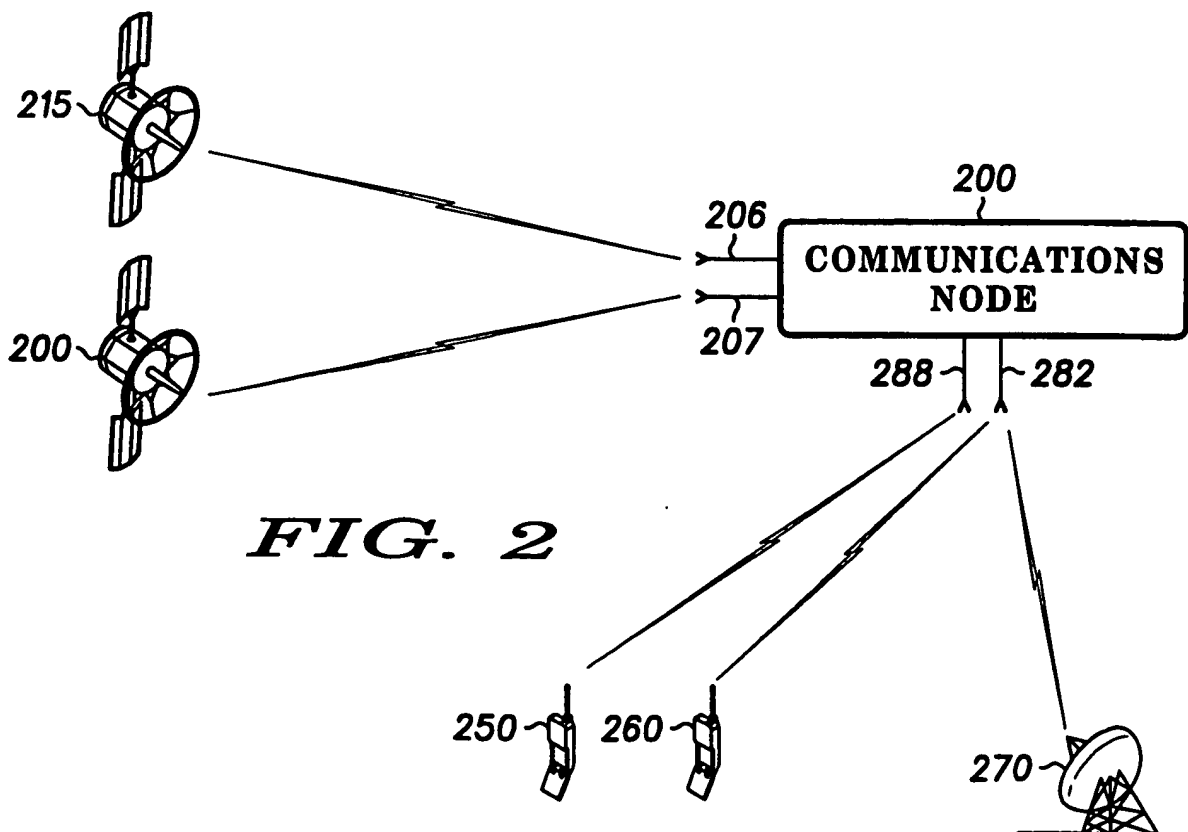
10. In a communication system comprising moving satellite nodes, a method for communicating comprising the steps of:

5 a subscriber unit code division modulating a voice signal with a pseudonoise code advanced by a time delay between a satellite node and the subscriber unit, the time delay changing as the satellite moves with respect to the earth's surface; and

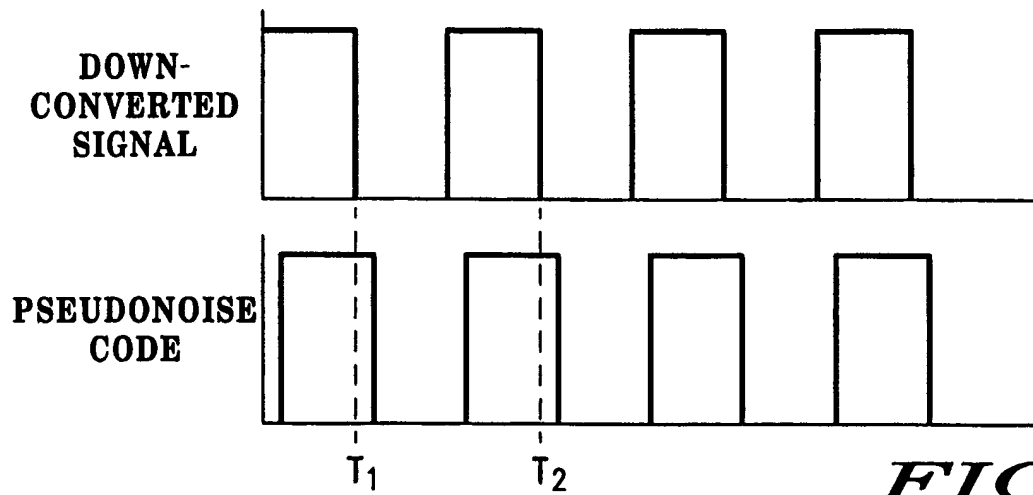
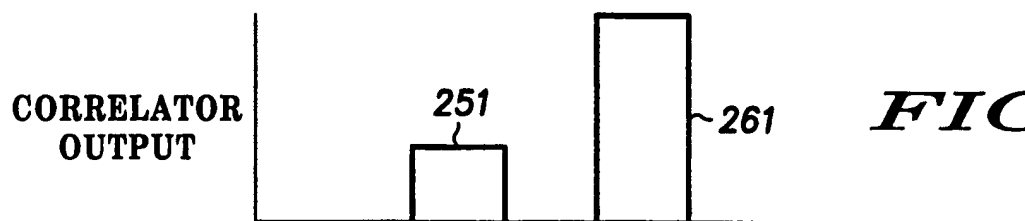
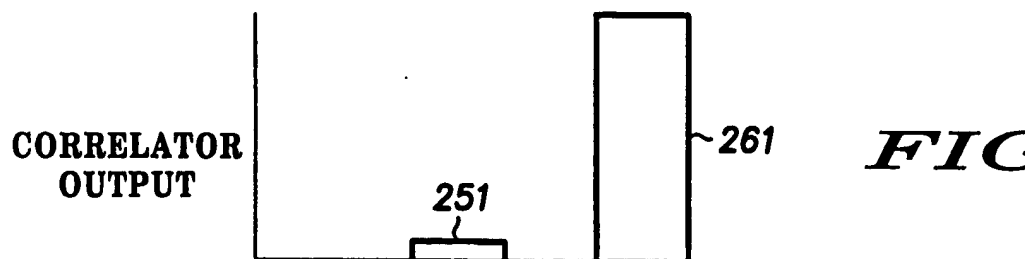
the subscriber unit transmitting the code division modulated voice signals to the satellite,

10 wherein the satellite correlates the received code division modulated voice signals with the pseudonoise code substantially synchronously with the code division modulated voice signal.

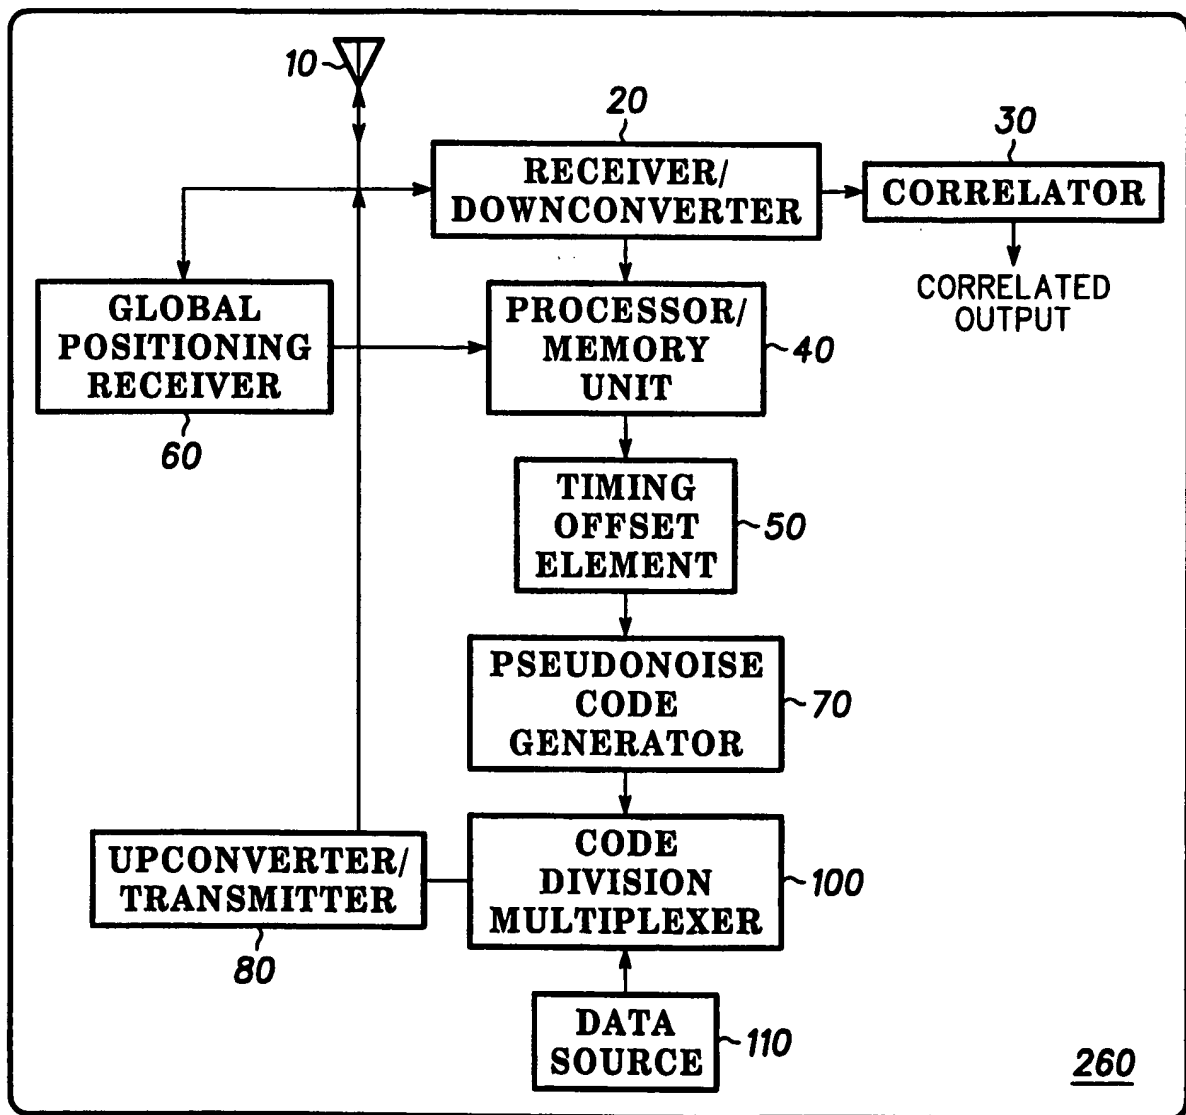
1/4

*FIG. 1**FIG. 2*

2/4

**FIG. 3****FIG. 4****FIG. 5**

3/4

**FIG. 6**

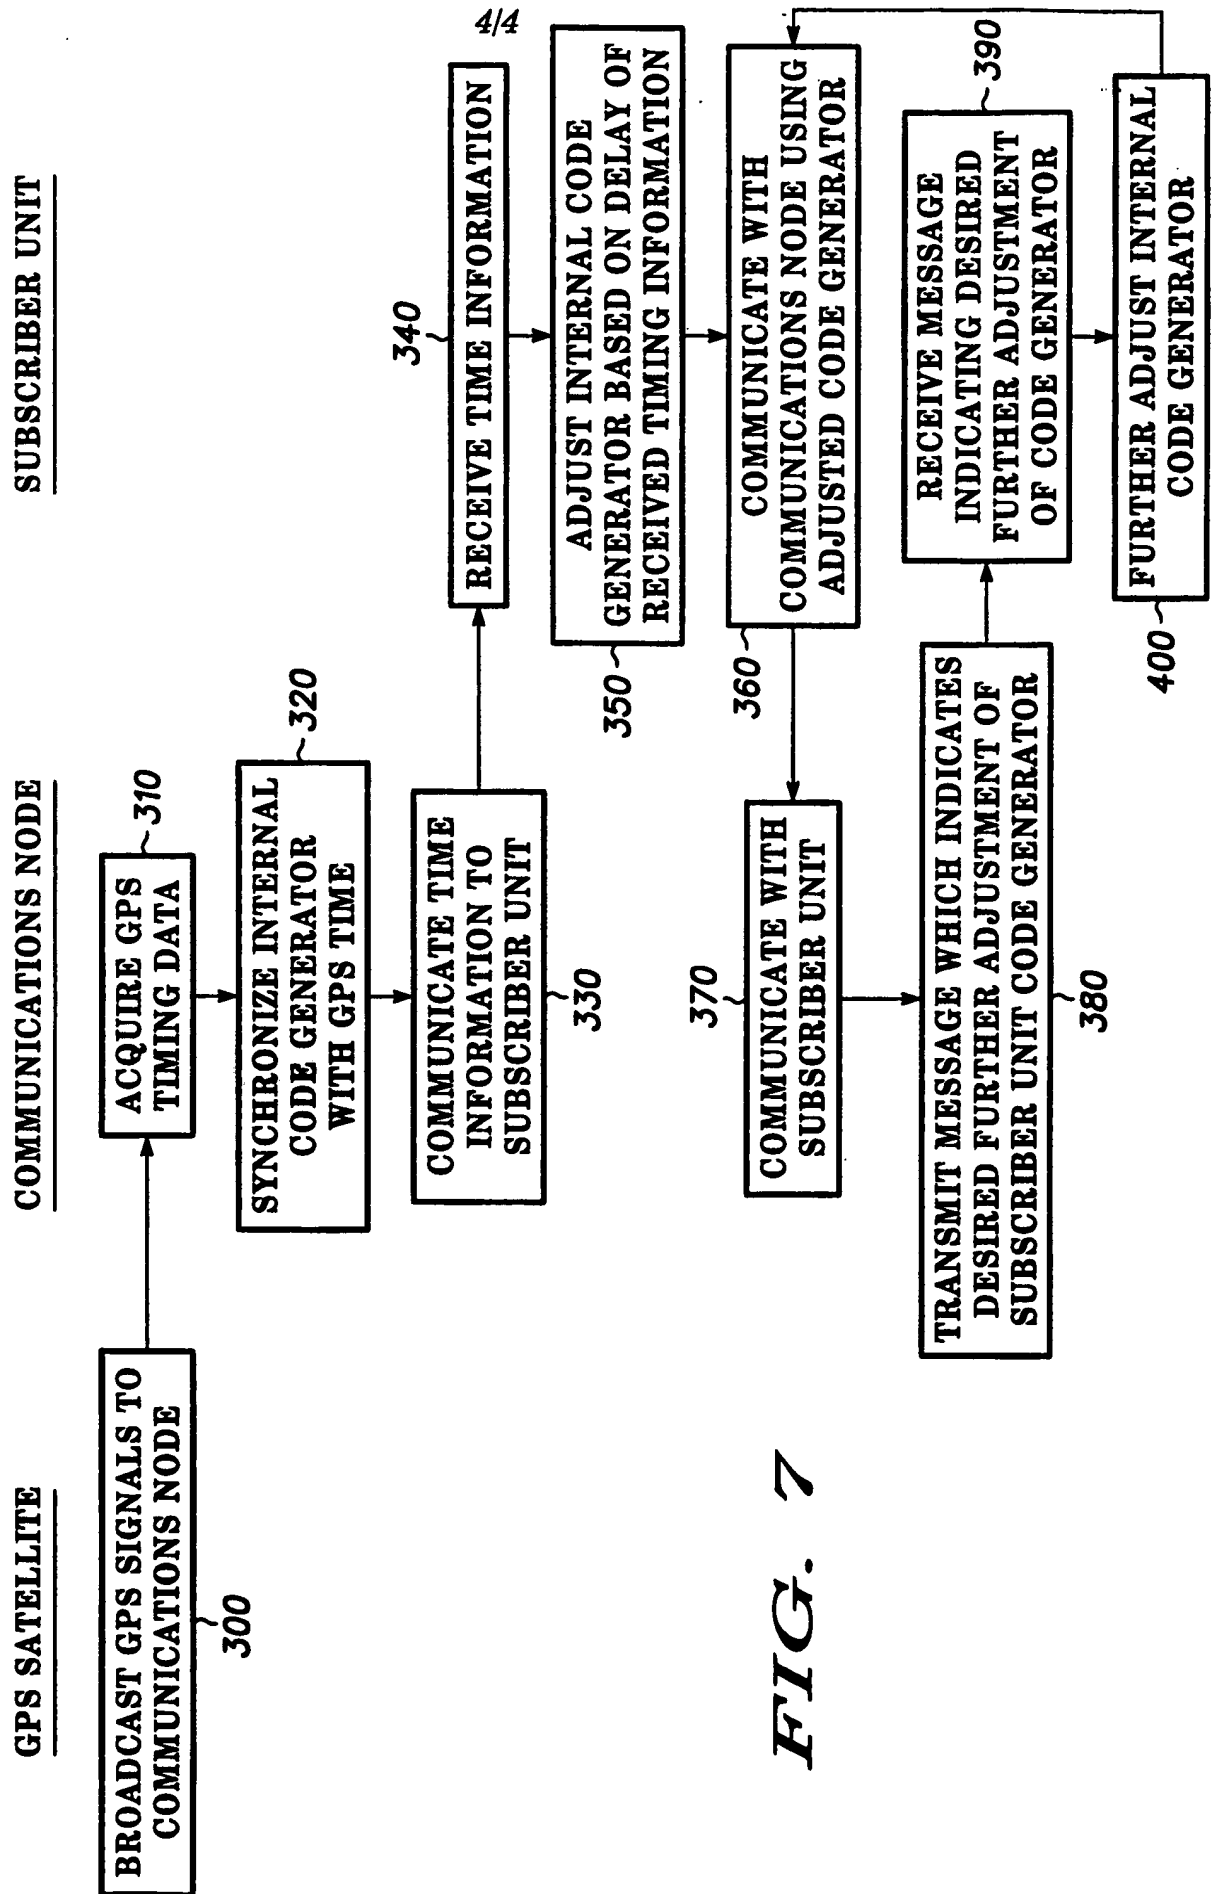


FIG. 7

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/16183

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04B7/26 H04B7/216

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 827 293 A (AT & T CORP) 4 March 1998 (1998-03-04)	1,2,6-11
Y	abstract; figures 3,4,14 column 1, line 27 -column 2, line 22 column 4, line 3 - line 17 column 4, line 52 - line 55 column 7, line 8 - line 40; figure 12	3-5
X	WO 95 15626 A (MOTOROLA INC) 8 June 1995 (1995-06-08) abstract; figures 1,2 page 2, line 1 - line 12 page 2, line 30 -page 3, line 11 page 4, line 25 -page 5, line 9 page 6, line 1 - line 10 claims 1,6,7	1,6-10

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

18 October 1999

Date of mailing of the international search report

26/10/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Sieben, S

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 99/16183

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 666 122 A (CARTER STEPHEN S) 9 September 1997 (1997-09-09)	3,4
A	abstract; figure 4 column 1, line 11 - line 43 column 2, line 35 -column 3, line 44; figure 2	5
Y	US 5 305 468 A (BRUCKERT EUGENE J ET AL) 19 April 1994 (1994-04-19) abstract column 3, line 27 -column 4, line 2; figures 3-5	5

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/16183

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0827293	A	04-03-1998	US 5838669 A	17-11-1998
			AU 3530097 A	05-03-1998
			BR 9704484 A	26-01-1999
			CA 2203475 A	28-02-1998
			CN 1182315 A	20-05-1998
			JP 10098447 A	14-04-1998
			SG 54523 A	16-11-1998
WO 9515626	A	08-06-1995	US 5446727 A	29-08-1995
			BR 9405751 A	05-12-1995
			CN 1116889 A	14-02-1996
			EP 0695484 A	07-02-1996
			FI 953407 A	12-07-1995
			GB 2290200 A,B	13-12-1995
			JP 10508435 T	18-08-1998
			SE 9502704 A	29-09-1995
US 5666122	A	09-09-1997	AU 699856 B	17-12-1998
			AU 3232795 A	09-02-1996
			CN 1152380 A	18-06-1997
			EP 0770288 A	02-05-1997
			WO 9602092 A	25-01-1996
			ZA 9505604 A	02-04-1996
US 5305468	A	19-04-1994	CA 2088720 A,C	19-09-1993
			KR 9608955 B	10-07-1996